


TB 20x60(M) - T-BAR 20x60 GRID FIXTURE

(METRIC OPTIONAL)

Project		
Catalog #		
Volts		Lamp(s)
Ballast Type		
Type		Date
Approved by		

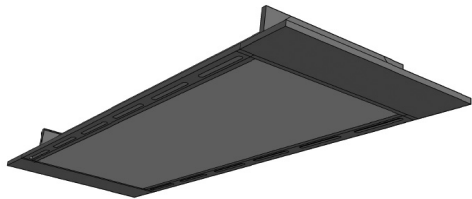

General

High performance lensed troffer for grid ceiling installations. Hinged door with rotary cam latches and only 4" depth for shallow plenums.

Reflectors

Specular reflectors to increase light and reduce lamps are available on request.

Housing & Finishing

Die-formed pre-painted cold rolled steel finished in high-gloss white.

Electrical

Standard easy access wiring plate .

Available in electronic ballasts only.

Available voltages: 120V/277V/347V and UNV.

Lens & Louvers


Prismatic acrylic K-12 pattern is standard. Lens is in framed door with cam latches and hinges

Other prismatic patterns, lenses and louvers are available upon request.

Approval


CSA certified.

Ordering Information

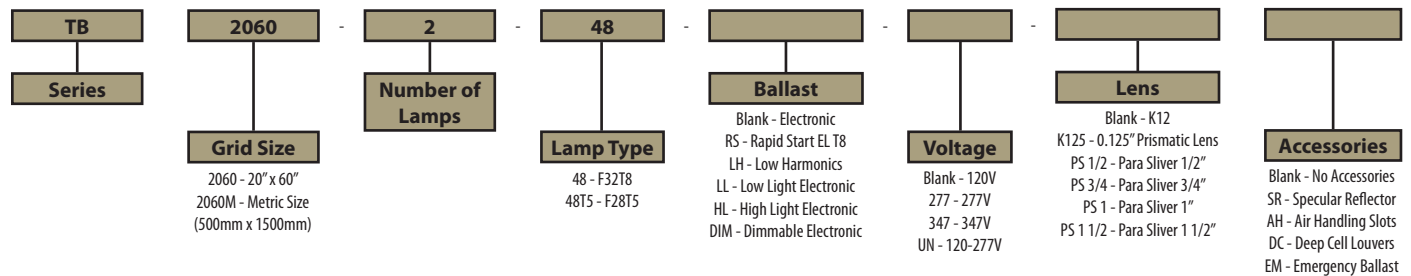


Product Availability

Item	Dimensions (L x W x D)	Lamps/ Cross Section	Lamps/ Fixture	Lamp Watt	
				T8	T5
TB 2060-248	60" x 20" x 4 1/4"	2	2	32	28
TB 2060-348	60" x 20" x 4 1/4"	3	3	32	28
TB 2060-448	60" x 20" x 4 1/4"	4	4	32	28
TB 2060M-248	1500mm x 500mm x 108mm	2	2	32	28
TB 2060M-348	1500mm x 500mm x 108mm	3	3	32	28
TB 2060M-448	1500mm x 500mm x 108mm	4	4	32	28

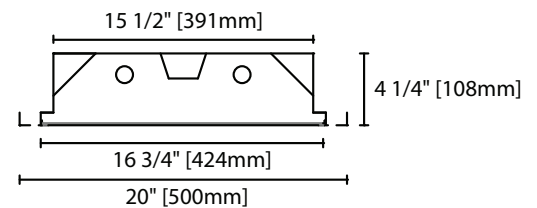

TB 20x60 Cross Section View

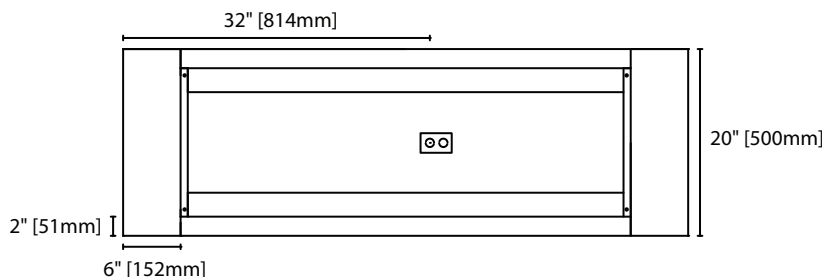

TB 20x60 Base View