

### General

High performance lensed troffer for grid ceiling installations. Hinged door with rotary cam latches and only 4" depth for shallow plenums.

### Housing & Finishing

Die-formed cold rolled steel finished in pre-painted high-gloss white.

### Lens & Louvers

Prismatic acrylic K-12 pattern is standard. Other prismatic patterns, lenses, and louvers are available upon request.

### Reflectors

Specular reflectors to increase light and reduce lamps are available on request.

### Electrical

Standard easy access wiring plate.


Available in electronic ballasts only.

Available voltages: 120V/277V/347V and UNV.


### Approval

CSA certified.

<b>Project</b>	
<b>Catalog #</b>	
<b>Volts</b>	<b>Lamp(s)</b>
<b>Ballast Type</b>	
<b>Type</b>	<b>Date</b>
<b>Approved by</b>	

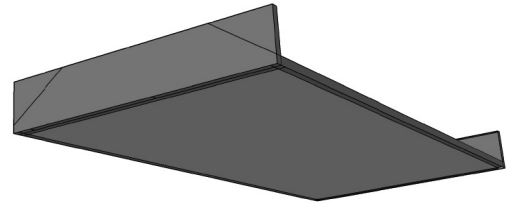


## Ordering Information

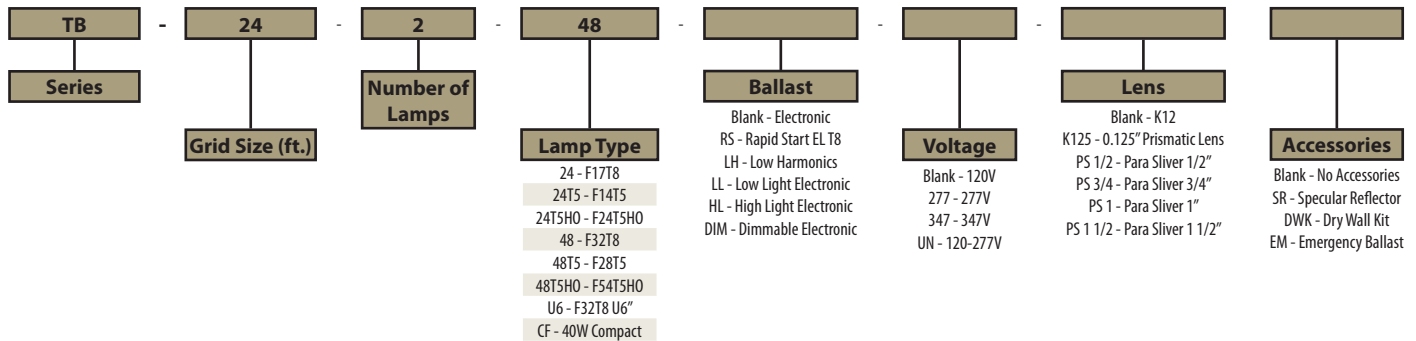


## Product Availability


Item	Dimensions (L x W x D)	Lamps/ Cross Section	Lamps/ Fixture	Lamp Watt	
				T8	T5
TB 12-224	24" x 12" x 4"	2	2	17	14
TB 14-148	48" x 12" x 4"	1	1	32	28
TB 14-248	48" x 12" x 4"	2	2	32	28
TB 22-2U6	24" x 24" x 4"	2	2	32	
TB 22-224	24" x 24" x 4"	2	2	32	28
TB 22-324	24" x 24" x 4"	3	3	32	28
TB 22-424	24" x 24" x 4"	4	4	17	14
TB 24-248	48" x 24" x 4"	2	2	32	28
TB 24-348	48" x 24" x 4"	3	3	32	28
TB 24-448	48" x 24" x 4"	4	4	32	28

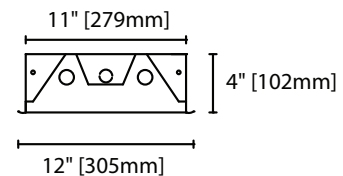

TB 1' Cross Section View

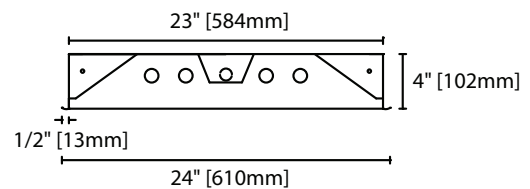

TB 2' Cross Section View

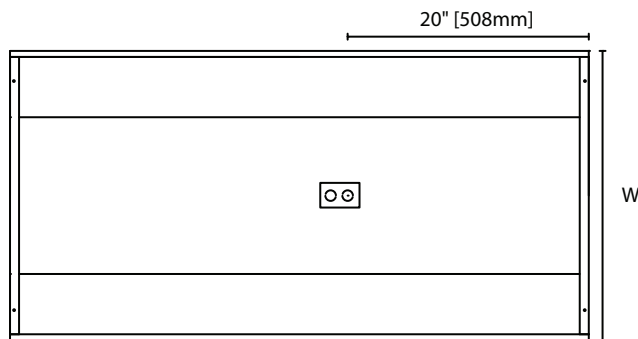

TB Base View