


# TBDC - T-BAR DEEP CELL

<b>Project</b>			
<b>Catalog #</b>			
<b>Volts</b>		<b>Lamp(s)</b>	
<b>Ballast Type</b>			
<b>Type</b>		<b>Date</b>	
<b>Approved by</b>			

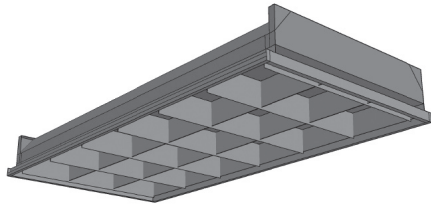

### General

Specification grade recessed deep-cell troffer with integral T-hinges & spring latches. Premium semi-specular louver provides optimal cutoff angle, low glare and maximum lumen efficiency.

Clean white interior without unnecessary holes and bends adds to the professional specification grade appearance.

### Housing & Finishing

Die-formed steel pre-painted in high-gloss white. Black "Reveal" surrounding louver on all sides gives a "floating" appearance.

### Louvers & Reflectors

Aluminium semi-specular louvers (3" nominal) are standard. Louvers enhance light distribution and provide better light output.

Optional air slots & custom metric sizes available on request.


### Electrical

Available voltages: 120V/277V/347V.

### Approval


CSA certified.

## Ordering Information

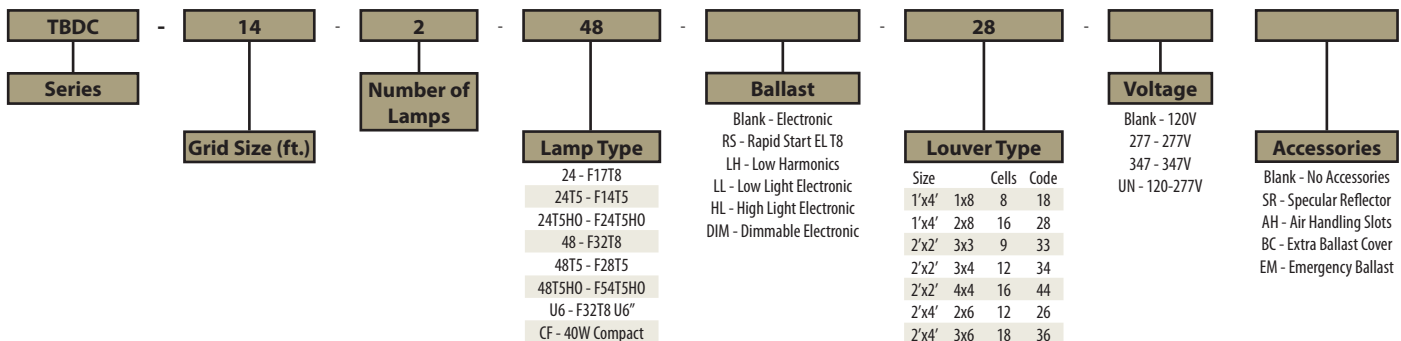


## Product Availability

Item	Dimensions (L x W x D)	Lamps/ Cross Section	Lamps/ Fixture	Lamp Watt		
				T8	T5	T5HO
TBDC 14-248	48" x 12" x 5 1/2"	2	2	32	28	54
TBDC 22-2U6	24" x 24" x 5 1/2"	2	2	32		
TBDC 22-2CF	24" x 24" x 5 1/2"	2	2		40	
TBDC 22-224	24" x 24" x 5 1/2"	2	2	17	14	24
TBDC 22-324	24" x 24" x 5 1/2"	3	3	17	14	24
TBDC 22-3CF	24" x 24" x 5 1/2"	3	3		40	
TBDC 22-424	24" x 24" x 5 1/2"	4	4	17	14	24
TBDC 24-248	48" x 24" x 5 1/2"	2	2	32	28	54
TBDC 24-348	48" x 24" x 5 1/2"	3	3	32	28	54
TBDC 24-448	48" x 24" x 5 1/2"	4	4	32	28	54

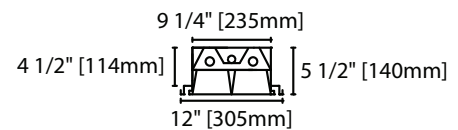


TBDC 1' Cross Section View

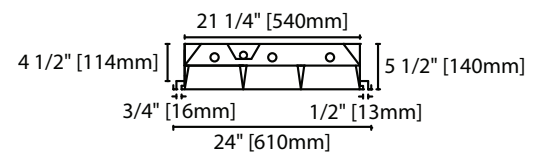

TBDC 2' - 3 Lamps Cross Section View



TBDC 2' - 4 Lamps Cross Section View

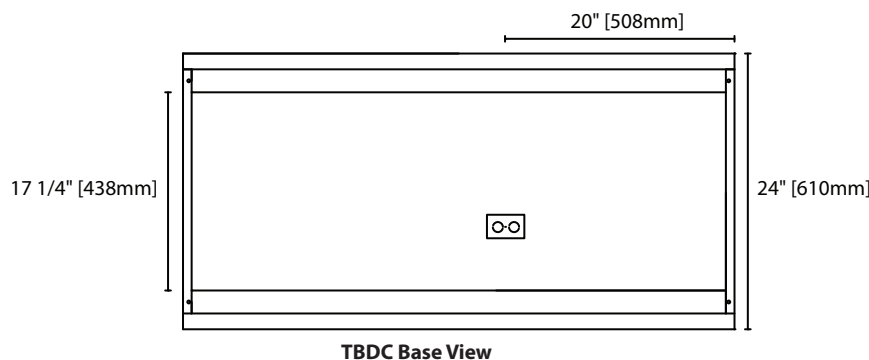

TBDC Base View